

Common Applications

- Designed to allow water tight penetrations of metal roofs where products such as tube mounted fans are to be installed

Features


- High resistance to weathering due to Ozone and UV Light
- Easy onsite customisation
- Easy base flexibility

Dectites

The standard roof flashing flexible design meets all roofing needs. Made of EPDM or Silicone, the flashings are compounded specifically for maximum resistance to weathering due to ozone and UV light. Easy On-site customization allows for easy installation in usually 5 minutes, and our flexible soft aluminium base is designed to form a seal on roof profiles and roof pitches regardless of pipe location.

Technical Data

Model	A	B	C
70-177	70	177	254
101-209	101	209	279
121-254	121	254	304
171-343	171	343	431
241-520	241	520	635

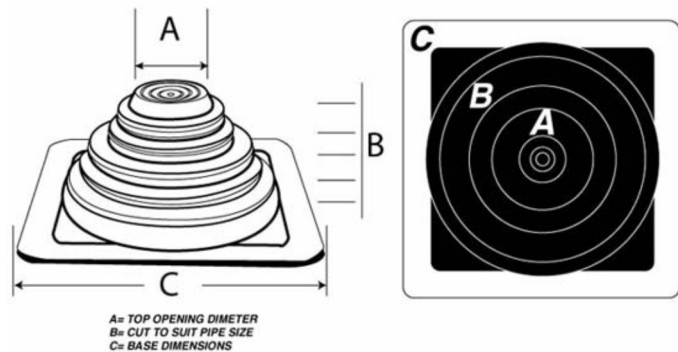

CFM Airsystems reserve the right to change design without any notice or obligation. Please refer to your local CFM Airsystems representatives for technical and installation details.