

Roof Cowl

Roof cowls are designed to provide a weatherproof opening in ducted systems to the outside of buildings. Models provide a range of sizes and capacities to suit almost any specification in either supply or exhaust air configuration.

Construction

The range is manufactured from a combination of corrosion protected steel and fibreglass


Features

- Low profile, attractive design
- Durable construction
- Available in optional Colorbond™ colours
- Fully weatherproof
- Bird proof

Testing


Aerodynamic performance has been determined by testing to DIN24163 (1998)

Roof Cowl

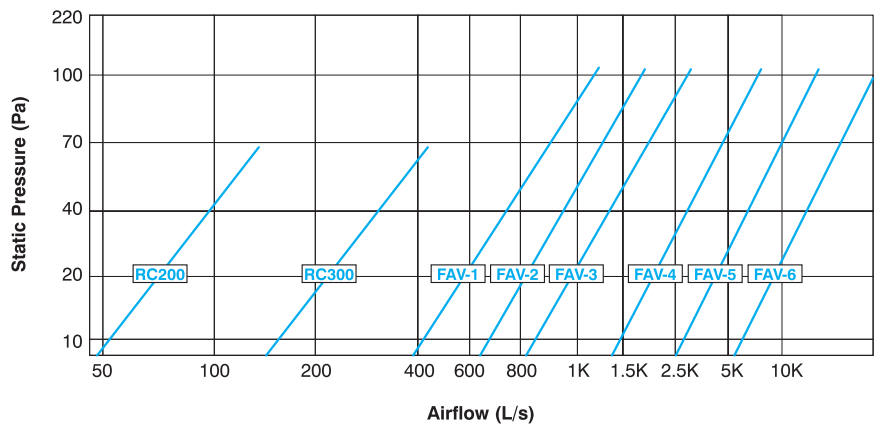

Technical Data

Model	A	B
R150	150	-
R200	200	-
R250	250	-
R300	300	-
RC200	210	300
RC300	330	400
FAV1	400	500
FAV2	500	610
FAV3	600	730
FAV4	740	840
FAV5	840	960
FAV6	1040	1160

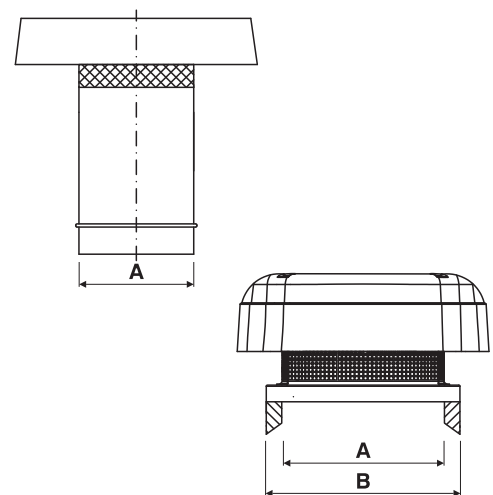

CFM Airsystems reserve the right to change design without any notice or obligation. Please refer to your local CFM Airsystems representatives for technical and installation details.

Issue 2016.06